

XVM279BT Firmware Update Instruction

Jan. 15 . 2021

MCU Firmware Update


1. Make the download folder of updated F/W file on the background of your PC.




2. Unzip the downloaded file and you can see the below folder.



3. Open the folder from unzipped folder.

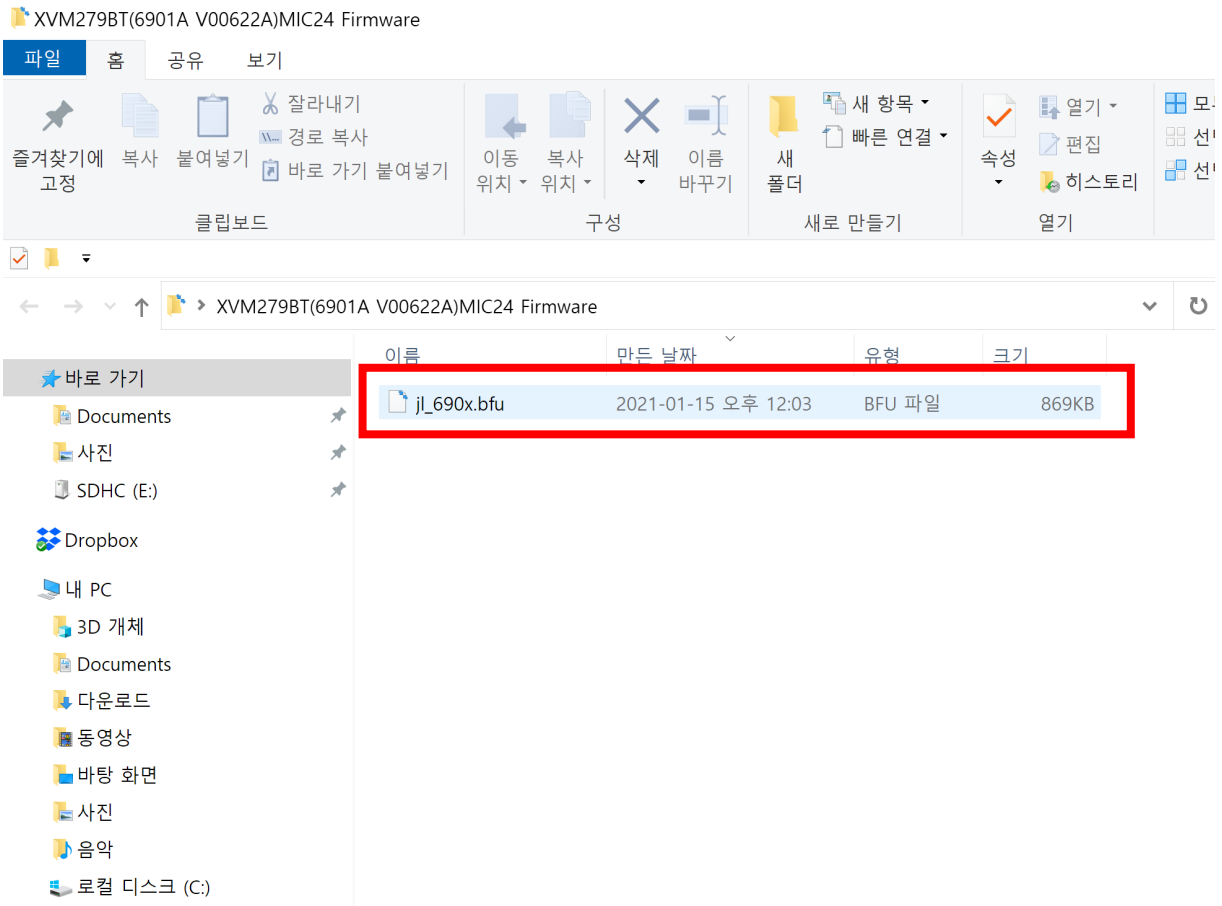

4. Find the updated firmware file, JL690x file, and copy it into your USB Thumb Drive.

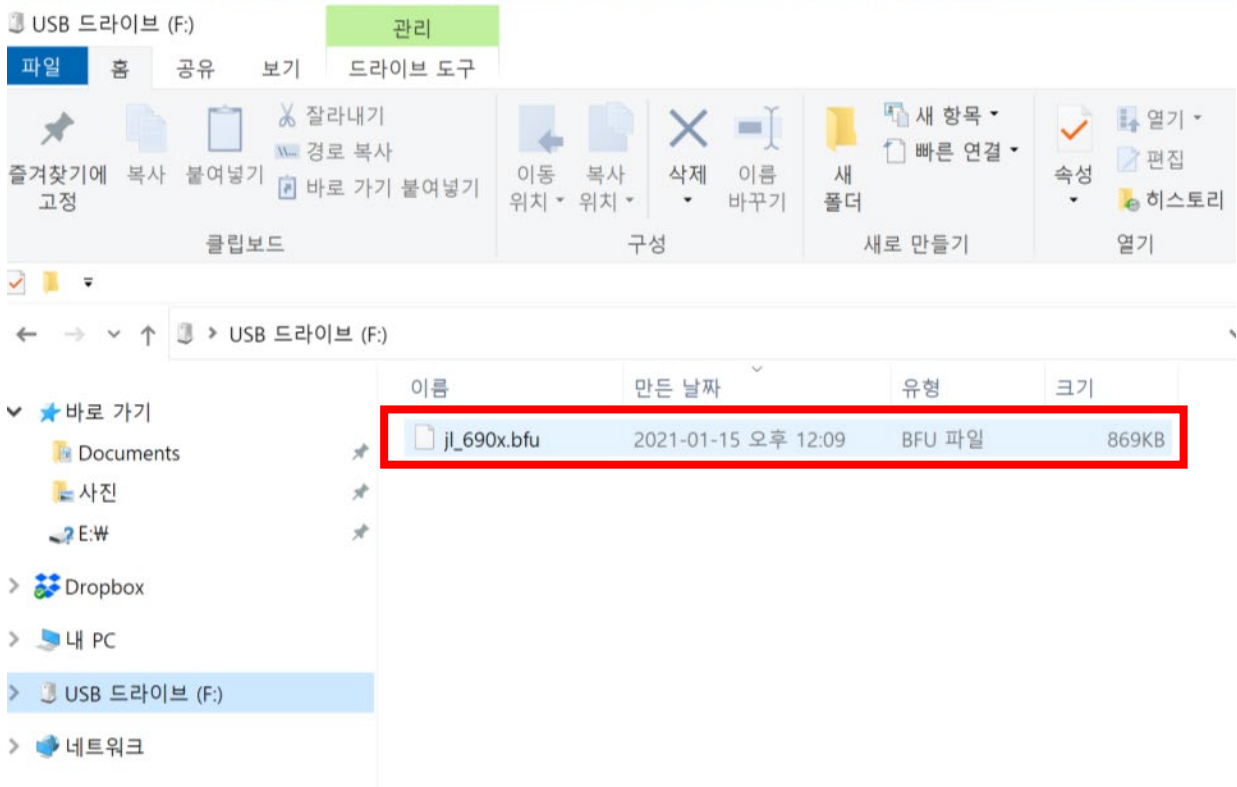

5. Insert the USB thumb drive that contains JL690x file into the USB Slot of XVM279BT unit in the radio mode as below.



6. When a USB Thumb drive with JL690x firmware is inserted into the USB port of the device, the TFT LCD will display as the following screen.



7. When the firmware update is completed, the unit power is off. When the Firmware Update is completed, remove the USB Thumb Drive from the unit.



Checked Update Firmware Version

1. On the Main Menu screen, select the Settings Icon.



2. On the Settings screen below, select the Version Menu that appears when you press the down arrow.



3. If you press the Version Menu, you can check the updated Firmware Version as shown below.

